

NTM-300

6" BR/PAR30 Open Trim with Bracket

Type _____

Project _____

Catalog No. _____

Notes _____

FEATURES

Trim: Metal trim with 3-7/8" open center and bracket.

Mounting: Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount socket on bracket.

COMPATIBLE HOUSINGS

Compatible with line voltage housings. See individual specification sheets for more information.

LAMP

Line Voltage:

75W BR/PAR30 Maximum (NFBIC-6INCATA ; NH-260; NH-270; NHIC-17/100DWQA; NHIC-17QAT; NHIC-17QNBAT; NHIC-27QAT; NHR-260; NHR-270; NHRIC-17QAT; NHRIC-17QNBAT; NHRIC-27QAT)

LABELS AND LISTINGS


cULus Listed for Damp Location when used with compatible housing.



PRODUCT IMAGES & DIMENSIONS



NTM-300W

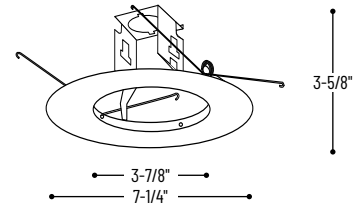

6" BR/PAR30 Open Trim with Bracket

Catalog No. _____

NTM-300W = 6" BR/PAR30 Open Trim with Bracket, White finish

Compatible Housings

Catalog No. _____

- NFBIC-6INCATA** = 2-Hour Fire Rated New Construction / 75W max.
- NHIC-17/100DWQA** = IC Air-Tight Double Wall New Construction / 75W max.
- NHIC-17QAT** = IC Air-Tight New Construction / 75W max.
- NHIC-17QNBAT** = IC Air-Tight New Construction, No Bracket / 75W max.
- NHRIC-17QAT** = IC Air-Tight Remodel / 75W max.
- NHRIC-17QNBAT** = IC Air-Tight Remodel, No Bracket / 75W max.
- NH-260** = Non-IC New Construction / 75W max.
- NHR-260** = Non-IC Remodel / 75W max.
- NH-270** = Non-IC Shallow New Construction Housing / 75W Max
- NHR-270** = Non-IC Shallow Remodel / 75W Max
- NHIC-27QAT** = ICAT Shallow New Construction / 75W Max
- NHRIC-27QAT** = ICAT Shallow Remodel / 75W Max

Example: **NTM-300W** = 6" BR/PAR30 Open Trim with Bracket, White finish